WIND MEASUREMENT / DATA SHEET

SS102H-02
Wind Direction Sensor

Reliable 360-degree wind direction measurement with robust EMC and surge protection.

Overview

- SS102H-02 is a high-reliability wind direction sensor for stable and accurate environmental wind direction measurement.
- The internal digital circuit captures the azimuth signal of the wind direction rod and outputs an electrical signal linearly related to wind direction.
- Alloy construction, sealed internal and rotating parts, and protection against RF, electromagnetic interference and lightning surge support demanding outdoor use.



Measuring range **0-360 deg**	**Start speed** **>=0.5 m/s**	**Accuracy** **16 directions**	**IP rating** **IP65**
Operating voltage **15-30 VDC**	**Wind resistance** **>70 m/s**	**Main material** **Aluminum alloy**	**Output** **4-20 mA / RS485**

Key Advantages

- Non-contact magnetic sensing measurement principle.
- Built-in high-performance sensor for accurate and reliable data collection.
- Full metal shell with corrosion and wind resistance.
- Aluminum-alloy wind direction rod for harsh operating conditions.
- Fault-tolerant circuit design helps protect against wiring errors.
- CE EMC, multi-level lightning protection and surge protection are stated in the source datasheet.

Application Scenarios

- Factories and electric power facilities.
- Ports, mines and construction machinery.
- Wind turbines and large mechanical equipment.
- High-altitude operations and outdoor wind monitoring.

Measurement Principle

SS102H-02 uses non-contact magnetic sensing. The internal circuit collects the azimuth signal of the wind direction rod and outputs an electrical signal that is linearly related to environmental wind direction.

Technical Specifications

Item	Specification
Measuring range	0-360 deg
Operating voltage	15-30 VDC
Starting wind speed	>=0.5 m/s
Accuracy	16 directions +/-3 deg; +/-2.5 deg

Item	Specification
Operating temperature	-20 C to +85 C
Working humidity	0%-95% RH, non-condensing
Wind resistance	>70 m/s for 30 min
Protection level	IP65
Main material	Aluminum alloy / polyester coating
Output signal	4-20 mA; 0-5 VDC; 0-10 VDC; RS485 (Modbus)
Group pulse immunity	Ordinary: Level 3 (2000 V, 100 kHz), Class B; lightning-resistant: Level 4 (4000 V, 100 kHz), Class B
Surge immunity	Ordinary: Level 1 (common mode 500 V, differential mode 250 V), Class B; lightning-resistant: Level 4 (common mode 4000 V, differential mode 2000 V), Class B

Technical indicators and cable definitions may vary by actual product configuration. Refer to the confirmed order and supplied wiring definition.

Output / Communication

Output Options


- 4-20 mA analog output.
- 0-5 VDC analog output.
- 0-10 VDC analog output.
- RS485 digital output using Modbus protocol.

Protection and Electrical Notes

- Operating supply: 15-30 VDC.
- Group pulse and surge immunity levels are listed in the specifications.
- Fault-tolerant protection is stated for wiring errors.
- Confirm the actual output and wiring configuration before connection.

Mechanical Dimensions / Installation

Source drawing dimensions are in millimetres. Overall length is 234 mm and overall height is 157.5 mm; the sensor body diameter is 38 mm. The electrical interface is marked M12 x 1. The mounting base is shown as 60 mm outer diameter, 47 mm inner diameter, with 4 x 6.5 mm mounting holes.

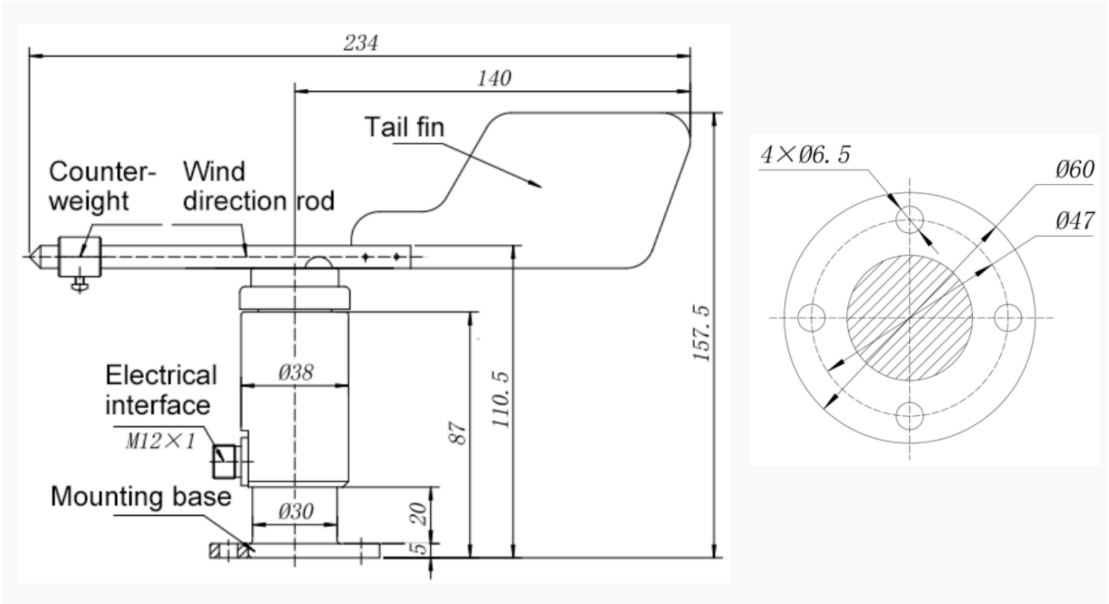

Mechanical drawing reproduced from the supplied source PDF

Electrical Connection / Wiring

Output	Line color	Definition
Analog signal output	Brown	+Vcc
Analog signal output	Blue	GND
Analog signal output	White	Iout / Vout
RS485 digital signal output	Brown	+Vcc
RS485 digital signal output	Blue	GND
RS485 digital signal output	White	RS485 A
RS485 digital signal output	Black	RS485 B

Other wiring methods may be customized; the specific wiring is subject to the actual product order.

Product Selection / Ordering Information

Selection	Configuration
Base model	SS102H-02 - Wind Direction Sensor
Output / power supply	4-20 mA / 24 VDC; 0-5 VDC / 24 VDC; 0-10 VDC / 24 VDC; RS485 / 24 VDC
Electrical connection	M12 connector / direct lead
Extended function	Standard type
Precision options	16 wind directions +/-3 deg; +/-2.5 deg
Measuring range	Wind direction angle, 0-360 deg
Units	Degree

Specify SS102H-02 together with the required output, power supply, precision and connection configuration.

CONTACT / SUPPORT

SpeSense Technologies Inc.
Add: No. 9 Yuhe Road, Guitang Subdistrict, Yuhua District, Changsha City
Tel: +86-15386478166
Email: info@spesense.com
Web: www.spesense.com

WHATSAPP WECHAT
WhatsApp / WeChat